

喷嘴 Nozzle

喷出冷却水, 主要用于钢带降温。罗特生产的喷嘴同时具有 卡式快插及雾状喷水的特点。

Nozzle sprays water to cool down steel belts, Naut nozzles is very convenient to use like a cassette inserted quickly and atomize water



水帘布 Water curtain baffle

Using transparent materials, through water curtain baffle it can be easy to observe equipment's inside and prevent cooling water out of equipment.



橡胶托轮及托轮卡

Rubber supporting roller and supporting roller ring

托轮卡固定住托轮, 让托轮在设备下方支撑下钢带。 Supporting roller ring fix the roller and make the roller to support steel belt under equipment.

钢带支撑 Steel belt support

钢带在冷却输送过程中, 使用电木或高分子耐磨材料支撑钢带。 While the steel belts is being cooled and conveyed,we use bakelite and

high polymer wear-resisting materials as steel belt supports.



烤炉用石墨条及托辊 Graphite bar and carrier idler are usde for oven

石墨条能在高温下支撑碳钢带, 并具有一定的润滑作用, 防 止钢带生锈及延长钢带寿命。

Graphite bar can support carbon steel belt under high temperature, with lubrication, it can prevent steel belt from rusting to extend steel belt's usage time.








(WAUT) 罗特定制备件

NAUT CUSTOM-MADE SPARE PARTS

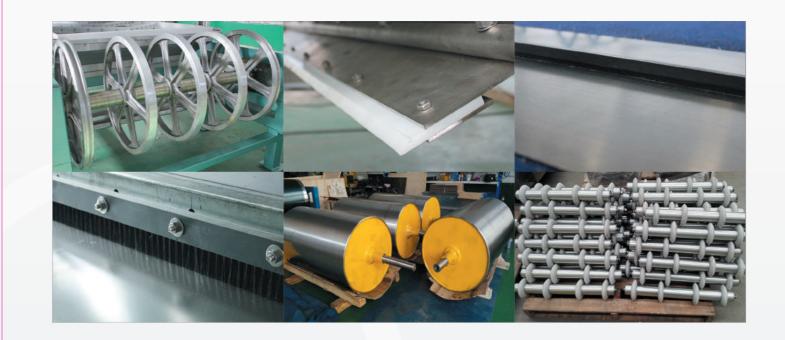

本册所有产品均为罗特制造 All products are from Naut

具体规格可按照客户要求量身定制 We can make to measure for customers

> 如需购买, 请致电 Contact us in below information

> > 021 - 67270219

上海罗特钢带有限公司

电话 Tel: 021-67270219 传真 Fax: 021-67270201

ShangHai Naut belts Co.,LTD(CHINA)


地址 Address: 上海金山工业区朱漕公路68号 NO.68,Zhu Cao Road Jin Shan ShangHai.China

网址 Web: www.nautbelts.com 邮箱 Email: sales@nautbelts.com



造粒机头

The drive system of granulation machine 包括电机,减速箱,链条,由电机变频调速,维护时可以抬升旋转,升降过程由气缸完成,旋转由手工驱动丝杆完成。The drive system of granulation machine consists of an electrical machine, reduction gearbox, chain, frequency controlled by the electrical machine.

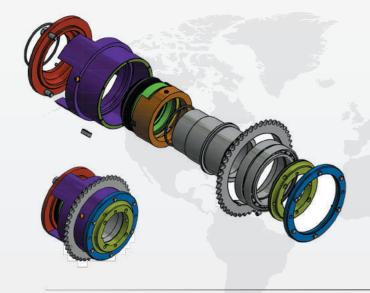

下料刮刀 The Scraper

把附着在钢带上的物料刮下。

The Scraper slick the attached materials from the steel belt.



刮刀清洁支座 The Scraper cleaning support

用弹簧压紧刮刀, 让刮刀贴紧轨道。

We use spring to press the Scraper tight, and make the Scraper close machine



刮刀及刮水胶皮 The Scraper and wiper rubber

刮刀把附着于钢带及轮毂上的物料刮平。刮水胶皮刮钢带背面水。 The Scraper slick the attached materials from the steel belt and hub. The wipe rubber scrape water from the backside of steel belt.



钢带纠偏装置 Steel belt tracking device

监测和调整钢带的对齐来确保跑偏维持在容许的误差内。

Monitoring and adjusting the tracking of steel belt to make sure the tracking within errors.







主动.从动轮毂 Driving drum /Tension drum

主要供货范围 Main scope of supply:

轮毂宽度 600, 800, 1000, 1200, 1500 Drum matched width for steel belt

轮毂直径 800,1000 Drum diameter



破碎机 Breaker

我司组织工程技术人员,通过对国内外钢带设备破碎方式深入研究改进完善,目前已研制出"无粉尘破碎机",实际使用后,破碎物料更细,粉尘极少。

双辊破碎机的两个破碎辊,由两个电机直接变频驱动,具备结构简单,噪音小,可靠性高的特点。

In actual practice, our breaker makes materials more smaller, cause little dust.

Twin roller crusher is direct frequency driven by two electrical machine, with a simple structure, low noise, and high reliability characteristics



轮辐 Wheel spoke

铝材质 Aluminum





毛刷 Brush

刮水和防止物料进入钢带及轮毂中间。

Brush is used for scraping water and preventing materials into the middle of steel belt and drum.

胶条及加热板 Rubber and heating panel

胶条粘接在钢带内侧, 主要有导向作用, 高胶条同时具有挡水及挡料的作用。罗特生产的食品级胶条达到了食品安全卫生要求, 使用中不容易产生杂物。

加热板主要用于在现场手工粘接胶条使用, 方便携带。

Rubber function: guiding function, warding off water ,warding off materials, Naut food grade rubber is up to food safety and hygiene requirements.

Heating panel is convenient to hand adhering to rubber on site, and you can take the heating panel easily.



